



Characteristics



- Decorative air curtain for vertical or horizontal installation.
- Self-supporting casing made in galvanised steel, finished in structural powder coated white RAL 9016 or grey RAL 9006. Other colours or stainless finished under request.
- Double inlet centrifugal fans equipped with external rotor motors with 5 speed selection. Very low noise level.
- Anodised aluminium discharge jet, with airfoil type lamella, adjustable from 0 to 15° in either direction.
- “P” types include heating coils. “E” types include electrical shielded batteries of three levels, with the power switches included. “A” types are without heating, air only.
- Controller included. Optional automatic regulation, compatible with BMS.


Specifications

Model	Airflow m ³ /h	Heating Capacity 80/60°C kW	Water Resistance 80/60°C Pa	Water Connections 80/60°C 2x3/4"	Heating Capacity 60/40°C kW	Water Resistance 60/40°C Pa	Water Connections 60/40°C 2x3/4"	Electrical Heating Capacity 3x400V-50Hz kW	Fans Power 230V 50Hz kW	Fan current 230V 50Hz A	Noise Level (3 m.) dB(A)	Weight Kg.
RUND M 1000 P	1800	11,30	5200	2x3/4"	9,70	6300	2x3/4"	-	0,536	2,38	54	-
RUND M 1000 E	1800	-	-	-	-	-	-	3/6/9	0,536	2,38	54	-
RUND M 1000 A	1800	-	-	-	-	-	-	-	0,536	2,38	54	-
RUND M 1500 P	2400	15,70	3600	2x3/4"	13,30	7900	2x3/4"	-	0,804	3,57	55	-
RUND M 1500 E	2400	-	-	-	-	-	-	4/8/12	0,804	3,57	55	-
RUND M 1500 A	2400	-	-	-	-	-	-	-	0,804	3,57	55	-
RUND M 2000 P	3600	22,60	10000	2x3/4"	20,80	7800	2x3/4"	-	1,072	4,76	56	-
RUND M 2000 E	3600	-	-	-	-	-	-	6/12/18	1,072	4,76	56	-
RUND M 2000 A	3600	-	-	-	-	-	-	-	1,072	4,76	56	-
RUND M 2500 P	4400	27,60	4800	2x3/4"	24,10	5800	2x3/4"	-	1,340	5,95	57	-
RUND M 2500 E	4400	-	-	-	-	-	-	6/12/18	1,340	5,95	57	-
RUND M 2500 A	4400	-	-	-	-	-	-	-	1,340	5,95	57	-
RUND G 1000 P	2700	15,50	2270	2x3/4"	10,80	7800	2x3/4"	-	0,804	3,57	55	-
RUND G 1000 E	2700	-	-	-	-	-	-	5/10/15	0,804	3,57	55	-
RUND G 1000 A	2700	-	-	-	-	-	-	-	0,804	3,57	55	-
RUND G 1500 P	3600	22,60	7300	2x3/4"	18,10	14400	2x3/4"	-	1,072	4,76	56	-
RUND G 1500 E	3600	-	-	-	-	-	-	7,5/15/22,5	1,072	4,76	56	-
RUND G 1500 A	3600	-	-	-	-	-	-	-	1,072	4,76	56	-
RUND G 2000 P	5400	33,50	5500	2x3/4"	26,10	12200	2x3/4"	-	1,608	7,14	57	-
RUND G 2000 E	5400	-	-	-	-	-	-	10/20/30	1,608	7,14	57	-
RUND G 2000 A	5400	-	-	-	-	-	-	-	1,608	7,14	57	-
RUND G 2500 P	6300	39,60	7500	2x3/4"	32,60	10300	2x3/4"	-	1,876	8,33	58	-
RUND G 2500 E	6300	-	-	-	-	-	-	12/24/36	1,876	8,33	58	-
RUND G 2500 A	6300	-	-	-	-	-	-	-	1,876	8,33	58	-



Dimensions

Curtain	L
1000	1025
1500	1525
2000	2030
2500	2530

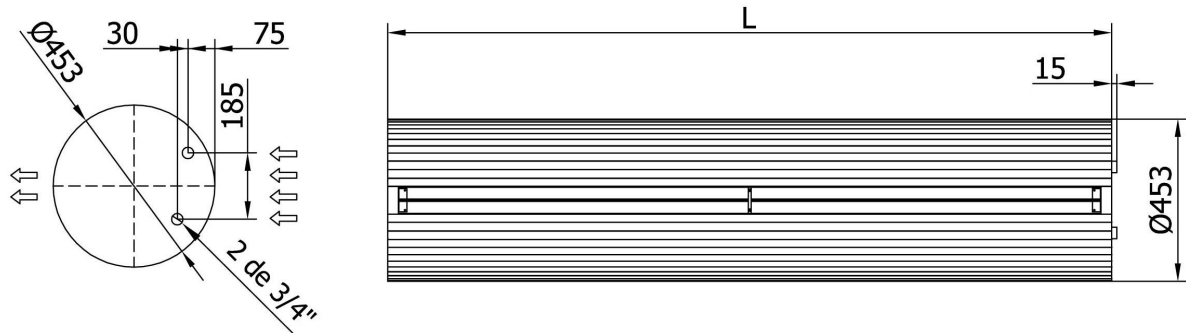

Pictures

