


# FILTER CELLS


FZ Secure



Barcode	Efficiency EN779:2012	Width A (mm)	Height B (mm)	Thickness C (mm)	Flow rate (m³/h)/ Delta P (Pa)
<b>G4 - ISO COARSE 65% ISO 16890</b>					
0808348	G4	287	592	47	1600 / 60
0808357	G4	287	892	47	2300 / 60
0808363	G4	400	400	47	1400 / 60
0808360	G4	400	500	47	1800 / 60
0808369	G4	400	625	47	2200 / 60
0808351	G4	492	592	47	2600 / 60
0808366	G4	500	500	47	2200 / 60
0808372	G4	500	625	47	2800 / 60
0808345	G4	592	592	47	3400 / 60
0808354	G4	592	892	47	4800 / 60

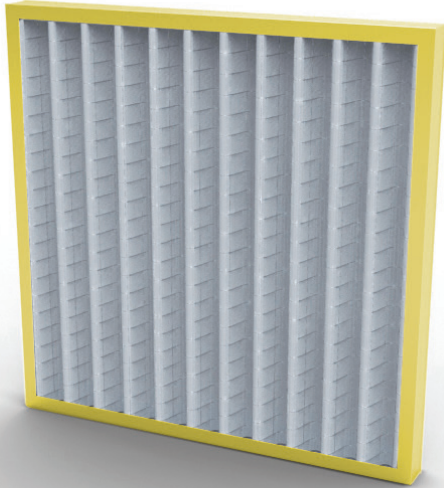

**Tip** Thanks to its low initial pressure drop and its 100% incinerable structure, this filter will perfectly meet your environmental policy requirements.



## APPLICATIONS

Thanks to its low initial pressure drop and its 100% incinerable structure, this filter will perfectly meet your environmental policy requirements.

## ADVANTAGES

- Very light and rigid filter
- High filtration area
- Low pressure drop
- Low energy use
- 100% incinerable
- M1 media fire rating upon request
- Tested for food contact according to CE 1935/2004

## GENERAL FEATURES

- Efficiency EN779:2012 : G4
- Media: Synthetic (M1)
- Grid: galvanized steel
- Frame: polyurethane (SECURE)
- Gasket: Half-round monobloc polyurethane (upon request)
- Final pressure drop: 250 Pa
- Maximum T° in continuous service: 80°C
- Humidity: 100% RH

